

Users Instruction & Installation Book for:

Coldstore Fridge 86102

You must read these instructions prior to using the appliance and retain them for future reference.

Your new Creda Coldstore Fridge

Electrical Requirements

suitable switched socket in a readily accessible position. We recommend that this appliance is connected to the mains supply via a

Cut off the old plug and throw it away, do not insert it into a socket elsewhere in the house as this could cause a shock hazard. has a 13A fuse. If the plug does not fit your sockets, a new plug can be fitted All Creda appliances come complete with a fitted plug. The plug on your fridge

WARNING: THIS APPLIANCE MUST BE EARTHED

IMPORTANT: Fitting a Different Plug:

Green and Yellow The wires in the mains lead are coloured in accordance with the following code:

Neutral

Brown

identifying marks on the plug terminals. This is what you have to do: If you fit your own plug the colours of these wires may not correspond with the

- Connect the green and yellow (Earth) wire to the terminal in the plug marked 'E' or with the symbol \pm , or coloured green or green and yellow
- Connect the blue (Neutral) wire to the terminal in the plug marked 'N' or coloured black.
- ASTA approved fuse to BS1362 must be fitted. in the main tuse box. In the event of replacing a fuse in the plug supplied, a 13A With alternative plugs a 15A fuse must be fitted either in the plug or adaptor or Connect the brown (Live) wire to the terminal marked 'L' or coloured red

obtained from your nearest Creda Spares Centre or local Electricity Company. replacement fuse cover has been obtained and fitted. A new fuse cover can be the tuse. In the event of losing the tuse cover the plug must **not** be used until a If the plug is the moulded on type the fuse cover must be refitted when changing

The colour of the correct replacement fuse cover is that of the coloured marks

Mains Lead Replacement

or insert in the base of the plug.

Parts stockist. It is essential that this operation is carried out by a qualified replaced by a special lead which is obtainable from your nearest Creda Spare If the mains lead on this appliance needs replacing at any time, it must be


modifications and Low Voltage Directive 73/23/EEC. down in the EEC Directive 89:336 (Electromagnetic compatibility) and subsequent NOTE: CE marking certifies that this appliance complies with the requirements laid

APPLIANCE OR TAMPER WITH THE CONTROLS WARNING: CHILDREN SHOULD NOT BE ALLOWED TO PLAY WITH THE SEPARATELY. DO NOT ATTEMPT TO STAND OR SIT ON TOP OF YOUR OLD FRIDGE OR FREEZER BE CERTAIN TO MAKE THE LOCK WARNING: AVOID ACCIDENTS TO CHILDREN. WHEN DISCARDING AN INJURE YOURSELF OR DAMAGE THE APPLIANCE BY SUCH ABUSE APPLIANCE. IT IS NOT DESIGNED FOR SUCH USE AND YOU COULD UNUSABLE. IF POSSIBLE, REMOVE THE DOOR AND DISCARD

> Just follow the step by step Repositioning the door hinge instructions below:

Spanner or a No. 2 Pozidriv. Remove all loose items/fittings Tools Required: A 7mm/8mm A/F

- Carefully lay the fridge on its back (you may need a second from inside the fridge.
- protective material (eg. its original pipework by keeping it clear of care to avoid damage to the packaging). person to support the fridge). Take the floor or by laying it on some
- Unscrew and remove the two ront feet.



- with the hinge. Unscrew and remove the bottom hinge. Ensure any spacing washers fitted, and the fixing screws, are kept
- pulling it downwards. Stand the door Remove the door by gently carefully to one side.
- Unscrew and remove the top hinge, then replace the screws.
- screws on the top left hand side and Remove the two hinge fixing use them to refit the top hinge
- Preparing the door for change side where the bottom hinge was. cabinet and refit on the right hand Remove the plate from the front/bottom left hand side of the
- a) Remove the top and bottom hinge thin blunt instrument taking care not bushes and the blanking plug, with a

the opposite side to mark the handle. Reposition on



- edge. Lift insert and replace on opposite side of door. spoon gently downwards to release above, and push handle end of the corner edge of insert, as shown the bowl section of a spoon beneath b) To reposition handle insert, place
- ninge bush. locating the top hinge pin in the door Refit the door, sliding it upwards,
- about the cabinet sides. ensuring the door is evenly positioned washers) into the bottom hinge bush Fit the bottom hinge (and spacing
- secure the bottom hinge to the Replace the adjustable front feet, Using the two fixing screws
- setting them 25mm from the bottom of the cabinet to the bottom of the foo for taller appliances. for appliances 850mm high or 36mm
- upright (you may need assistance for appliance does not rock. the front feet until all four feet are in this) in the required location. Adjust firm contact with the floor and the Carefully stand your fridge

(See Installing Your Fridge.)

- evenly around the cabinet. treely. Ensure door seal is seated Check the door opens and closes
- for at least 15 minutes before being items/fittings. The fridge must be stood upright Finally put back all the loose
- contact your local Service Office. **NOTE:** If difficulties are encountered

switched on.

- Do: Store and cook frozen foods in given on the packets that you accordance with the instructions
- Do:- Defrost the frozen food compartment regularly, see pages 11 and 12.
- Do:- Package and store cooked and raw tood separately.
- Do: Always defrost frozen food unless the instructions on the thoroughly before cooking packet state otherwise.

- Don't:- Store bananas in your fridge
- Don't:- Store melon in your fridge. It periods as long as it is can be chilled for short other food. wrapped to avoid it flavouring
- Don't:- Wash eggs as this removes Wipe them instead. their natural protective film.
- Don't:- Use eggs straight from the Allow them to reach room making cakes or mayonnaise fridge, especially when temperature before use.
- Don't:- Let defrosting food or food uices drip onto food in your
- Don't:- Leave the door open for long make the tridge more costly periods as this will cause excessive ice formation and
- Don't:- Cover the shelves with any protective materials which through them. may obstruct air circulation
- Don't:- Put liquid-filled bottles or sealed cans containing carbonated liquids (fizzy drinks, etc) in the frozen food

4

- compartment as they may
- Don't:- Try to keep frozen food which Don't:- Give children lollipops and cause 'freezer burns' on their frozen food compartment. water ices direct from the cooked and refrozen. eaten within 24 hours or has thawed; it should be The low temperature may
- Don't:- Store poisonous or edible foodstuffs only. designed for the storage of fridge. Your fridge has been dangerous substances in the
- Don't:- Consume food which has been stored for an excessive time in the fridge.

If your Fridge won't **¥ork**

- 1. Check that the plug is firmly in the CredaCare Service Centre. before calling your nearest just run through these quick checks ... don't panic.
- socket by plugging in another Check the power supply to the

wall socket and that the power supply


3. If the other appliance works, check the fuse in the refrigerator's plug.

appliance.

- 5. If there is excessive noise or check the wiring (see page 2). 4. If you have changed the plug,
- vibration, check that all four feet are firmly in contact with the ground (see
- to page 13 for further instructions. If the interior light fails to work, refer

BOOK erence as it contains important ce. or move house and leave it the new owner can become	Retention of this Instruction Book This Instruction Book must be kept handy for reference as it contains important details on the safe and proper use of the appliance. If you sell or pass the appliance to someone else, or move house and leave it behind, make sure this Book is also provided so the new owner can become familiar with the appliance and safety warnings.
see separate service leaflet.	For details of spares, service and guarantee see separate service leaflet.
14-15	If your Fridge won't work Repositioning the door hinge
	Table Top Going Away Replacing the Interior Light Do's and Don'ts
11-14	Caring for your Fridge Defrosting Cleaning
10-11	Storing Food In the Fridge Compartment In the Frozen Food Compartment In the Chiller Tray
8-9	Controlling the Temperature Frozen Food Compartment Fridge Compartment
7	Getting your Fridge ready for use Starting and Running In
nits	Where to put your Fridge Installing next to a Freezer Cut away shelf Fitting decor panels to match your kitchen units
5-7	Installing your Fridge
4	Get to know your Fridge
Page	THIS BOOK COVERS MODEL 86102

Get to know your Fridge

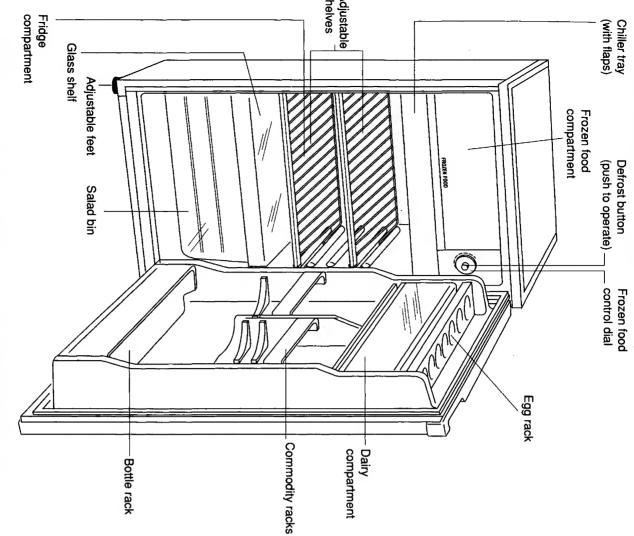

WARNING: CHILDREN SHOULD NOT BE ALLOWED TO PLAY WITH THE APPLIANCE OR TAMPER WITH THE CONTROLS.

Table top

This is designed to serve as an extra worksurface, but be careful with it. Do not drop heavy objects on it and do not sit or stand on it!

Going away

If you expect to be away for any length of time and don't want to use your fridge, switch off at the power point and pull out the plug. Remove all food and follow the defrosting instructions (pages 11 and 12). After defrosting wipe out the interior. Always leave the door ajar to prevent the accumulation of odours.

How to replace the interior light Should the light fail to work, switch off and pull out the mains plug, then ensure the bulb is screwed securely into the bulb holder. Replace the plug and switch on. If the light still fails to work, do not worry, it will not affect the working of your fridge. Obtain a replacement SES 15 Watt bulb from a local electrical retailer or your nearest Creda Spares Stockist and then fit it as follows:

Switch off and pull out the mains plug.

- Remove the wire shelves to make access easier.
- Stacken off the lamp guard, undoing the pozidrive retaining screw by one turn.
- Unclip and remove the lamp guard
 Unscrew the old bulb and fit the
- Refit the lamp guard, ensuring that the two legs opposite the retaining screw fit into the holes.
- Retighten the retaining screw.
 Replace the plug and switch on.

Do's and Don'ts

3

- Do:- Store raw meat and poultry below cooked foods and diary products.
- Do:- Clean out your salad crisper regularly.
- Do:- Take off any unusable leaves on vegetables and wipe off any soil.
- Do:- Leave lettuce, cabbage, parsley and cauliflower on the stem.
- Do:- Wrap cheese firstly in greaseproof paper and then in a polythene bag excluding as much air as possible. For best results take out the fridge an hour before eating.
- Do:- Wrap raw meat and poultry loosely in polythene or aluminium foil. This prevents drying.
- Do:- Wrap fish and offal in polythene bags and store as close to the frozen food compartment as possible, the chiller tray is a good place, but follow the instructions above.
- Do:- Wrap foods which have a strong odour, or can dry out, in polythene bags, aluminium foil or place in airtight containers.
- Do:- Keep food for as short a time as possible and adhere to 'best by' dates.
- Do: Wrap bread well to keep it fresh.
- Do:- Chill white wines, beer, lager and mineral water in the fridge compartment before serving.
- Do:- Wrap frozen food when you buy it and put it into the frozen food compartment as soon as possible.
- Do:- Empty and refill the ice tray periodically to ensure freshness.

- want to defrost quickly, otherwise Leave the main door open if you keep it closed.
- will pop out. don't worry, simply flex the tray and it tray. If the water in it has refrozen, 6. After defrosting, empty the chiller
- positions. reset the flaps to their original 7. Wipe out the chiller tray, dry it and
- food taken out of it. 8. Replace the chiller tray and any
- 9. Refill the ice cube tray and replace. 10. Job done!

If you are storing frozen food

quickly as possible, as follows: Defrosting must be carried out as

- in the fridge compartment or a cool several layers of newspaper and put 1. Remove frozen foods, wrap in
- 2. Remove the ice cube tray.
- chiller tray to the fridge compartment 3. Move anything being stored in the
- 5. Turn the frozen food control dial to 4. Close both flaps on the chiller tray

thoroughly dry.

before you refill the fridge ensure it is but also leave a smell in the fridge. These not only damage the surfaces,

- 6. Place a bowl of very hot water in the frozen food compartment.
- Leave the main door open.
- 8. After defrosting, empty the chiller
- tray, wipe it out and dry it.
- original positions. 9. Reset the chiller tray flaps to their
- food taken out of it. Replace the chiller tray and any
- food compartment. Remove the bowl from the frozer
- to its original position (see page 8) Unwrap the frozen food and Reset the frozen food control dia
- replace. 14. Refill the ice cube tray and

Cleaning your fridge

abrasive powders or wax polish. household cleaner or detergent, programme. Never use any dishwasher, but only if positioned on trays may be washed in a and commodity racks and ice cube parts, should be washed. The bottle the top rack and on a low temperature including the door, and removable according to the manufacturer's one pint of water or Milton diluted instructions. The complete interior teaspoonful of bicarbonate of soda to switch off and pull out the mains tridge using a solution of either one plug first. Wipe out the inside of the your fridge after defrosting. Always It is a good idea to clean the inside of

can be carefully cleaned. Use a brush disconnected from the mains when dust. Always check that the fridge is or vacuum cleaner to remove any condenser at the back of the fridge Finally, the compressor and only as detergent will damage it. cloth. Do not use an abrasive be cleaned with soap and water powder. The rubber door seal must using a small amount of detergent, followed by a wipe down with a clean not the door seal, with a damp cloth Clean the outside of your fridge, but


plug and switch on atter cleaning your Remember to re-connect the mains

Installing your Fridge

Where to put your fridge

damaged by the heat. will cost more to run and may also be and the fridge. In such a position your fridge will have to work harder and must be left between the hot object unavoidable an air gap of 10mm (1/2") which gives off heat, a cooker or work surface is often a good position. radiator for example. If this is is easy to use, alongside or beneath a Your fridge should be placed where it Try to avoid putting it near anything

automatically ensures adequate are against the wall. This slot in the spacer for your air circulation at the back of the particular type of condenser, Pust the fridge back until the spacers the condenser using the correct wall spacers supplied to the top of most suitable place, fit the two Once you have decided on the



is not enough clearance available at the rear of the worksurface. If there recommend the fitting of an air grille running cost of your appliance we increase efficiency and reduce the sure there is a gap of 30mm (11/4") underside of the worksurface. To between the top of the fridge and the maintain operating efficiency. Make ventilation must be provided to worksurface, then adequate If the fridge is placed underneath a

> 86003, is available from either your retailer, your nearest Creda Spares with your fridge. the Accessories Order form supplied Stockist or from Creda direct by using then ventilation must be provided by fitting an air grille. This grille, Part No.

avoids excessive vibration and noise. with the floor. Correct adjustment until all four feet are in firm contact them clockwise or anti-clockwise, adjusting the two front feet by turning standing correctly by carefully Finally, make sure your fridge is



or damage the appliance by such use and you could injure yourself not attempt to stand on top of the Note: You should not stack your Spares Stockist or Creda direct using fridge; it is not designed for such fridge with any other appliance. Do the Accessories Order Form supplied from your retailer, your nearest Creda to the back of your fridge, is available A Wheel Kit, Part No. 86002, for fitting

Installing next to a Freezer

which is available from your retailer, your nearest Creda Spares Stockist or Linking Kit required is Part No. 86001 make them look like one unit. The correctly (see diagram above). model 86307, you can join them to avoid a build up of condensation. Linking: If you have Creda Freezer (2") between the two appliances to either free standing or linked. Make sure both appliances stand the Freezer, but leave a gap of 50mm Free standing: Just slide in next to This can be done in one of two ways,

Order Form supplied with your Fridge. Creda direct using the Accessories

The kit comes complete with wheels so that the unit can be easily moved. The width of linked appliances is 1108mm (43.6 ").

Note: To ensure that the doors function properly you will need to change the left hand appliance so that its door hinges on the left hand side (see page 15).

Also make sure that the two appliances stand correctly and firmly (see page 5).


Fitting decor panels to match your kitchen units

For that fully co-ordinated kitchen look it is possible to fit a matching decor panel to your fridge. A special Decor Panel Frame kit is available that attaches to the edges of the appliance door and enables a decor panel, up to 4mm (1/8") thick, to be fitted. Decor panels are available from most kitchen suppliers.

Your fridge requires Decor Panel Frame Kit Part No. 86004.

Commodity rack adjustment

The commodity racks have been designed to be adjustable which enables you to make maximum use of the storage capacity of the inner door. To remove the commodity rack simply lift the front of the rack to release it from the fixing groove in the door liner. To replace the rack tilt the back of the rack and push it into the preferred fixing position (see diagram below). Ensure that the rack is securely fixed before loading by applying light downward pressure to the front of the rack.



Order Form supplied with your fridge

nearest Creda Spares Stockist or Creda direct using the Accessories

These are available from your retailer

All foods should be wrapped or covered to prevent drying out and flavour transference. Plastic bags, containers with lids, foil and plastic stretch wrap are ideal. (Always refer to the manufacturers instructions for the use of plastic stretch wrap.) Never put hot or warm food into your fridge as this reduces efficiency. Left over canned food should not be stored in the can; place it in a covered storage container and place in the fridge.

Storing food in the frozen food compartment

You can store up to 3.7 kg (8.1 lb) in your frozen food compartment. Storage times depend on the setting you use and the type of food being stored. For best results always store pre-packed frozen foods in accordance with the frozen food manufacturer's instructions. Some packs will be marked with star markings matching those on the door of the frozen food compartment. Frozen food should be wrapped when bought and stored as soon as

If you have set your frozen food compartment to give two star **

Performance (setting 5 in normal conditions), you can store frozen food for the following approximate periods:

Sensitive Fruits

stored for more than one week.

Storing food in the chiller tray

You can store fresh food in the chiller tray, but you should remember three things:

- Do not allow it to touch the frozen food compartment or it will become stuck.
- It will tend to freeze as this is a very cold area.
- **Do not** attempt to store frozen fooc in this area, it is not cold enough to keep it fully frozen.

Caring for your Fridge Defrosting Why and When:

Frost build-up reduces the efficiency of your fridge. It can also make closing the frozen food compartment door difficult. This is why you **must** defrost your fridge regularly. We recommend that you defrost your fridge once a week. Frost will build up more quickly in your fridge if you leave the door open or put warm food into it.

Never try to chip the frost away as you can easily damage the refrigerated surfaces of the frozen food compartment.

If you are not storing any frozen food

Defrosting is very simple. Just follow these steps:

- 1. Remove the ice cube tray.
- Move anything being stored in the chiller tray to the fridge compartment
 Close both flaps on the chiller tray
- Press the button in the centre of the frozen food control dial; this switches the fridge off, it will restart automatically when defrosting is complete.


Storing Food

Storing food in the fridge compartment

REMEMBER: Your fridge or freezer can't turn bad food into good, if the food doesn't look or smell right don't store it or eat it, throw it away.

You can store most fresh foods in your fridge. A guide to the maximum storage times are given in the table. It is advisable to read the storage/use by instructions provided on the packaging. Select chilled foods last when shopping transport them home in a 'cool bag' and place in the fridge as soon as possible after arriving home.

Frozen food

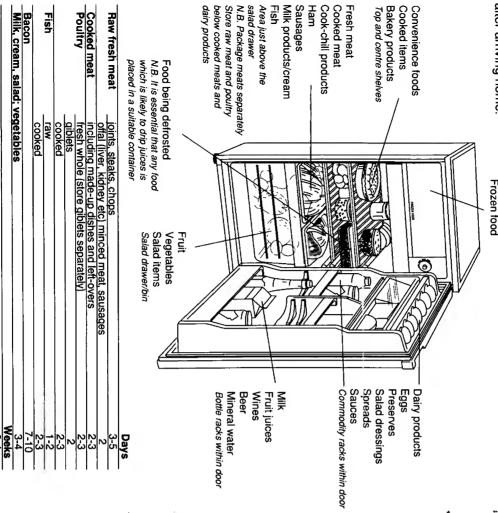

Adjustable/tilting shelves

The shelving system in the fridge interior has also been designed to provide maximum storage flexibility. It is possible to position the shelves at various heights to suit the items being stored.

Getting your Fridge ready for use

Before using your fridge for the first time the interior, including the door, and all removable parts should be wiped out. Use a damp cloth wrung out in either a solution of one teaspoonful of bicarbonate of soda to one pint of water or Milton diluted according to the manufacturer's instructions.

WARNING: NEVER USE ANY HOUSEHOLD CLEANER OR DETERGENT, ABRASIVE POWDERS OR WAX POLISH. THESE NOT ONLY DAMAGE THE SURFACES, THEY ALSO LEAVE A SMELL IN THE FRIDGE.

Final check

Before you start using the fridge, check that

- 1. It is thoroughly dry inside,
- . Air can circulate freely, at the rear
- The feet have been adjusted, ie.all four are firmly on the ground.

Starting

Insert the plug into the wall socket and switch on the electricity supply. Open your fridge door and the light will come on. There is a control dial on the right hand side of the fridge interior. Turning the dial clockwise from '0' (off) will start the fridge working. You will hear a noise as the compressor starts up.

Running-in the compressor

The liquid and gases sealed within the refrigeration system may give rise to noise, whether the compressor is running or not. This is quite normal.

Your fridge is operated by a compressor which switches on and off in order to maintain the fridge's temperature. The compressor is a precision piece of machinery like a car engine, and requires a running-in period of up to 2 months. During this time the compressor has to work a little harder and this may result in more noise than usual.

Note: Your fridge is designed only for domestic purposes: for the storage of fresh and frozen food.

Eggs

Butter, margarine and cooking fats
Cheese hard

Controlling the Temperature

Frozen food compartment

store frozen food. depends on how long you want to 2, 3 9. Which setting is selected compartment and is marked '0' (off), 1, temperature in the frozen food side of the fridge interior, controls the The control dial, on the right-hand


setting. month. This is the most popular setting the control dial to 5 and allows compartment. This is achieved by performance in the frozen food Your fridge gives you a two star ** you to store frozen food for up to one

to 2 and allows you to store frozen is achieved by setting the control dia opting for a one star (*) setting. This You can reduce running costs by food for up to one week.

Fridge compartment

open the door and the room compartment. It is also affected by the compartment changes when you alter The temperature of your fridge temperature. location of the fridge, how often you the temperature of the frozen food

setting the chiller tray flaps. table on page 9 gives a guide to flows into the fridge compartment. The tray control the amount of cold air that The two flaps at the rear of the chiller

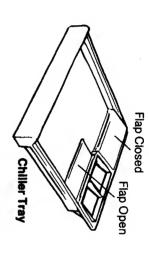

 Frozen Fo	od Compa	Frozen Food Compartment Setting	Sugg	Suggested Flap Settings	tings
Control Setting	Star Rating	Temperature	Cool Room Temperature	Average Room Temperature	Warm Room Temperature
 22	*	—6°C (21°F) or colder	1 Open 1 Closed	1 Open 1 Closed	Both Open
 5	**	—12°C (10°F) or colder	Both Closed	Both Closed	1 Open 1 Closed
 The chiller the fridge i further adji	tray must n order to ustments:	The chiller tray must be pulled out of the fridge in order to adjust the flaps. If further adjustments are necessary,		the compressor has to work hard and run for longer periods. This is quite normal. Conversely,	to work hard eriods. Conversely,
 further adju	ustments a	are necessary,	This is	This is quite normal. Conversely,	Conversely,

proceed as follows:

Fridge Compartment Too Warm:

control dial clockwise to a colder warm with both flaps open, turn the setting (higher number) the fridge compartment is still too Open one or both chiller tray flaps. If

very warm. required if the room temperature is Note: Settings above 5 will only be

Fridge Compartment Too Cold:

setting (lower number). dial anti-clockwise to a warmer with both flaps closed, turn the control the fridge compartment is still too cold Close one or both chiller tray flaps. It

temperatures around the fridge in conditions giving high NOTE: In the summer months, or

> shorter periods. compressor will run for much during cold weather, the arder

and 5°C, though some sections such temperatures inside. as the Salad Crisper will be warmer. refrigerator should be between 0°C The temperature inside your Frequent door openings cause higher

accordingly or detrosting may be centre of the middle shelf. If the If using a thermometer to check the then the controls should be adjusted temperature reading is above 5°C temperature, it should be left on the required

WARNING: DO NOT USE HEALTH HAZARD. AS BREAKAGE COULD CAUSE A MERCURY FILLED THERMOMETER